



2x2 Tile Speaker

MODEL G22 / G22-C

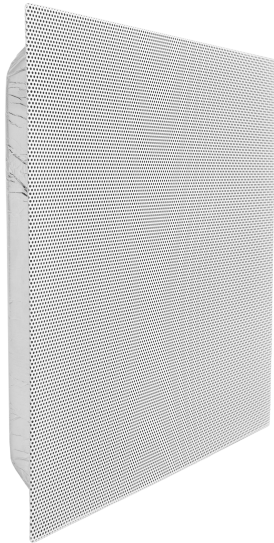

Standard Perforation Pattern
Shown as 1" Square Sample

FUNCTION


The 2x2 Tile Speaker is a shallow depth speaker designed for use in acoustical ceiling grid applications. The 2x2 is mounted parallel to the floor plane in a 24" wide suspended ceiling tile grid. The 2x2 Tile Speaker is UL Listed, lightweight and consists of an 8" O.D. loudspeaker with a 5 oz. magnet and an 8 Ohm impedance. The molded fiber enclosure is 1,283 CID. The 2x2 Tile Speaker has a powder coated steel baffle with standard perforation and four (4) seismic tie-off points. A Chicago version with conduit box is also available.

LOUDSPEAKER

Average Sensitivity:	92dB SPL, 1W/1M
Loudspeaker Power Rating:	12W RMS, EIA 426A Standard
Maximum Power Rating:	15W @ 45 Ohms
Calculated Output:	102dB SPL, 12W/1M
Magnet Type & Weight:	BeFe Ceramic, 5 oz. Nominal
Frequency Response:	65Hz - 17kHz, EIA 426A Standard
Nominal Coverage Angle:	100° Included Angle, -6dB/2kHz, Half Space
Audio Connection:	RJ45

SPEAKER DIMENSIONS

Dimension:	3½" (H) x 23 13/16" (W) x 23 13/16" (D)
Weight:	6.05 lbs.
Loudspeaker Model:	G22
Loudspeaker Specs:	8" O.D. loudspeaker, 5 oz. magnet
Integral Enclosure:	1,283 CID molded fiber
Grille:	Standard perforated steel with four (4) seismic tie-off points
Finish:	White powder coat finish

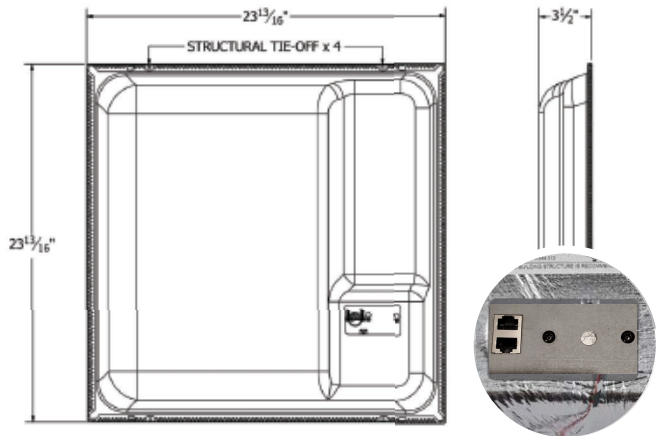

AGENCY LISTINGS

- + UL 1480: Approved for use as speakers for use in fire alarm, emergency, and commercial and professional use. US and Canada.
- + UL 2043: Approved for use in air handling spaces